




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B05D 1/04, B05B 5/14	A1	(11) International Publication Number: WO 98/11999 (43) International Publication Date: 26 March 1998 (26.03.98)
<p>(21) International Application Number: PCT/FI97/00558</p> <p>(22) International Filing Date: 18 September 1997 (18.09.97)</p> <p>(30) Priority Data: 963708 19 September 1996 (19.09.96) FI</p> <p>(71) Applicant (for all designated States except US): VALMET CORPORATION [FI/FI]; Panuntie 6, FIN-00620 Helsinki (FI).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): ILMASTI, Veikko [FI/FI]; Tölinmäki 10 A, FIN-00640 Helsinki (FI). NYBERG, Timo, R. [FI/FI]; Koivuviita 12 B 6, FIN-02130 Espoo (FI).</p> <p>(74) Agent: BERGGREN OY AB; P.O. Box 16, FIN-00101 Helsinki (FI).</p>	<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report. In English translation (filed in Finnish).</p>	

(54) Title: PROCEDURE AND APPARATUS FOR TRANSFERRING OF ADDITION TO THE SURFACE OF A MOVABLE MATERIAL WEB

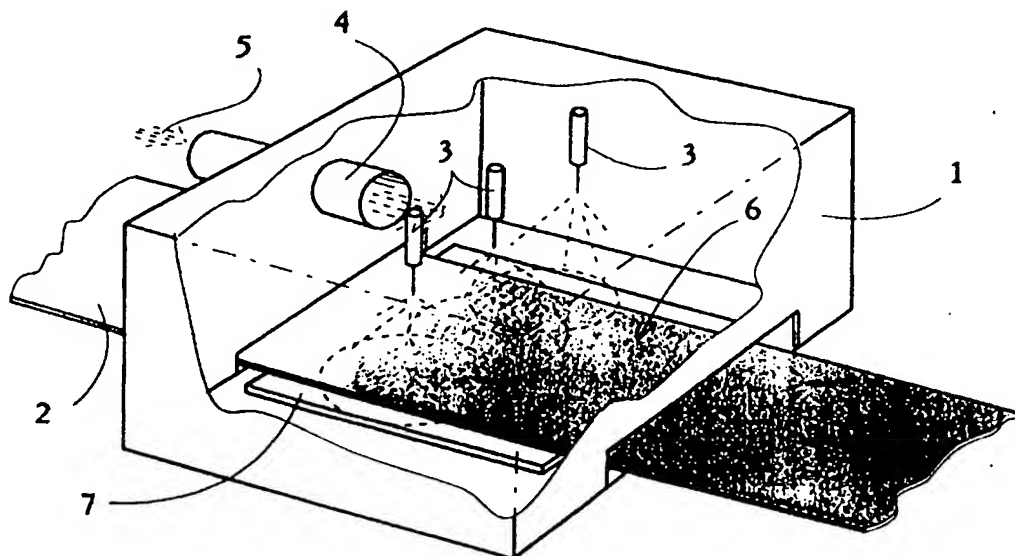

(57) Abstract

A method for transferring in an encapsulated space (1), with the aid of high voltage, additional material (5) onto the surface of a material web (2) moving through the space. The additional material which is added onto the surface of the material web (2) is brought into the housing (1) in a controlled manner in the form of dust or spray (5), for example. The dust or the spray particles are transferred onto the surface of the material web (2) in the encapsulated space (1) by using ion blasting.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NK	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

PROCEDURE AND APPARATUS FOR TRANSFERRING OF ADDITION TO THE SURFACE OF A MOVABLE MATERIAL WEB

5 The object of the invention is a method which is used to transfer, in an encapsulated space and by using high voltage, additional material onto the surface of a material web which moves through the encapsulated space.

One conventional manufacturing process of material is a continuous web formation process. These processes include milling out of metals to form foil, and the manufacture of plastic and other coatings, films, paper, and cardboard. In addition
10 to its geometric main form (flat and plate-like), many other properties are rendered to the material during the web formation process. One of the most common ways to provide the other properties referred to above is to manipulate the functional surface of the material. This manipulation can be effected either by adding a substance onto the surface of the base material, i.e., by coating, or by changing the properties of the
15 material surface chemically, thermally, mechanically, electrically or in some other way.

In the known methods and devices, material has been transferred onto the surface of the web by spraying or by using a direct contact, such as painting with a brush. In both cases, the amount of transferred material has to be fairly large and, typically,
20 solvents have to be used in the process to accomplish a sufficient mass flow rate. In spray painting, it is known to use an electric charge to advance the transfer of material. In this case, the nozzle of the paint spray constitutes one of the electrodes. This deviates fully from the method now presented in which the electrode is not provided in the nozzle. Furthermore, the voltage levels are different. Solvents are also used to
25 advance the adhesion between the added substance and the web. A drawback then arises that the solvent has to be removed from the process; in the coating of paper, for instance, this implies expensive drying. To improve the printing qualities of the web materials, mainly plastics, a so-called corona charging system is used (less than 50 kV, typically less than 20 kV) in which the surface energy of a polymer film can
30 be increased by using electric discharge. Therefore, the fairly low voltage that is used makes it necessary to use a small gap between the electrodes, making it difficult to control the process. Furthermore, the obtained power remains low because the current cannot be increased limitlessly. To make very thin coatings, so-called PVD technique (Physical Vapour Deposition) can be used but it requires a vacuum
35 and, therefore, does not apply to coating a fast-moving web. Moreover, PVD often requires high temperatures.

The purpose of the invention is to eliminate the disadvantages presented above and to provide a new method and a device which can be used to apply additional material easily, quickly, and evenly onto the desired surface of a moving material web. The method according to the invention is characterised in that the additional material which is added onto the surface of the material web is brought into the housing in a controlled manner in the form of dust or spray, for example, and that the dust or the spray particles are transferred onto the surface of the material web in the encapsulated space by using ion blasting.

The device according to the invention is characterised in that the housing is provided with an opening through which the additional material is conveyed to the housing in the form of dust or spray, for example, and that high voltage is supplied to the high-voltage electrodes in the housing, providing ion blasting towards the material web moving through the housing, whereby the additional material in the form of dust or spray in the housing is transferred onto the surface of the material web with the aid of ion blasting.

Different embodiments of the invention are presented in the dependent claims of the array of claims.

The device is very well-adapted to transfer minor amounts of coating, such as a few grams or fractions of a gram per square metre in paper manufacture. Now very small amounts of chemicals can be added onto the surface of paper, for example, improving the operating characteristics of the paper. Up till now, it has been impossible or very difficult to spread small amounts of material evenly, or it has required a great amount of solvent, water or the like which has had to be removed from the paper afterwards.

In paper manufacture in particular, the use of water can be decreased, which is advantageous in many ways. For example, the need for drying is decreased and energy is saved; the amount of circulating water is decreased and the need for cleaning is reduced.

The invention is described in the following with the aid of an example and with reference to the appended drawing in which:

Fig. 1 is an axonometric, partly sectioned view of the device according to the invention, and

Fig. 2 shows the same device as Fig. 1 but as viewed directly from the side and cut open.

The device consists of housing 1 through which material web 2 moves, additional material being added onto the surface of the web with the aid of electrodes 3 in housing 1. Housing 1 is provided with opening 4 through which the additional materials is conveyed to the housing as indicated by arrow 5. The additional material is in the form of dust or spray, for example. High voltage is supplied to high-voltage electrodes 3 in housing 1, providing ion blasting towards material web 2 moving through the housing, whereby the additional material which is in the housing in the form of dust or spray is transferred onto surface 6 of material web 2 with the aid of ion blasting. Electrodes 3 are arranged above material web 2 so that the additional material settles and forms an even surface 6 on the upper surface of material web 2, with the aid of the ion blasting. Below material web 2 in the housing there is provided a plate-like electrode 7, the material web travelling on top of the electrode.

103-1

CLAIMS

1. A method for transferring additional material (5) in an encapsulated space (1), with the aid of high voltage, onto the surface of a material web (2) moving through the space, characterised in that the additional material that is added onto the surface of the material web (2) is brought to the housing (1) in a controlled manner in the form of dust or spray (5), for example, and that the dust or the spray particles are transferred onto the surface of the material web (2) in the encapsulated space (1) by using ion blasting.
2. A method according to Claim 1, characterised in that the ion blasting is provided by using electrodes (3) in the housing (1), a voltage of more than 50 kV being supplied to the electrodes.
3. A device for implementing the method according to the Claim, comprising a housing (1) through which the material web (2) moves, additional material being added onto the surface of the web by using the electrodes (3) in the housing (1), high voltage being supplied to the electrodes, characterised in that the housing (1) is provided with an opening (4) through which the additional material is conveyed to the housing in the form of dust or spray (5), for example, and that high voltage is supplied to the high-voltage electrodes (3) in the housing (1), providing ion blasting towards the material web (2) moving through the housing (1), whereby the additional material in the form of dust or spray in the housing is transferred onto the surface (6) of the material web (2) with the aid of the ion blasting.
4. A device according to Claim 3, characterised in that the electrodes (3) are arranged above the material web (2) so that the additional material settles and forms an even surface (6) on the upper surface of the material web (2) with the aid of the ion blasting.
5. A device according to Claim 3 or 4, characterised in that a plate-like electrode (7) is provided below the material web (2) in the housing (1), the material web travelling on top of the electrode.

1/1

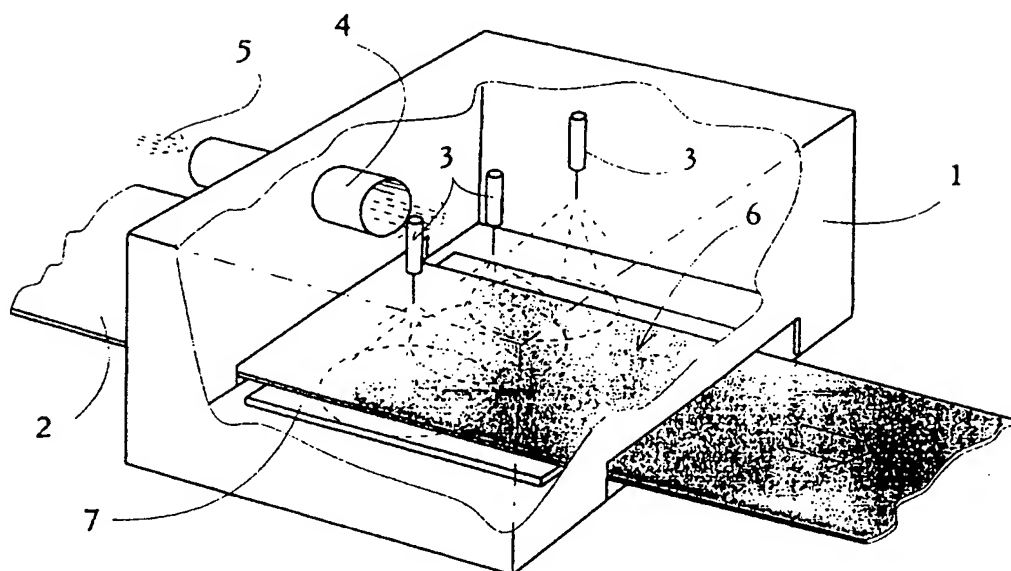


Fig. 1

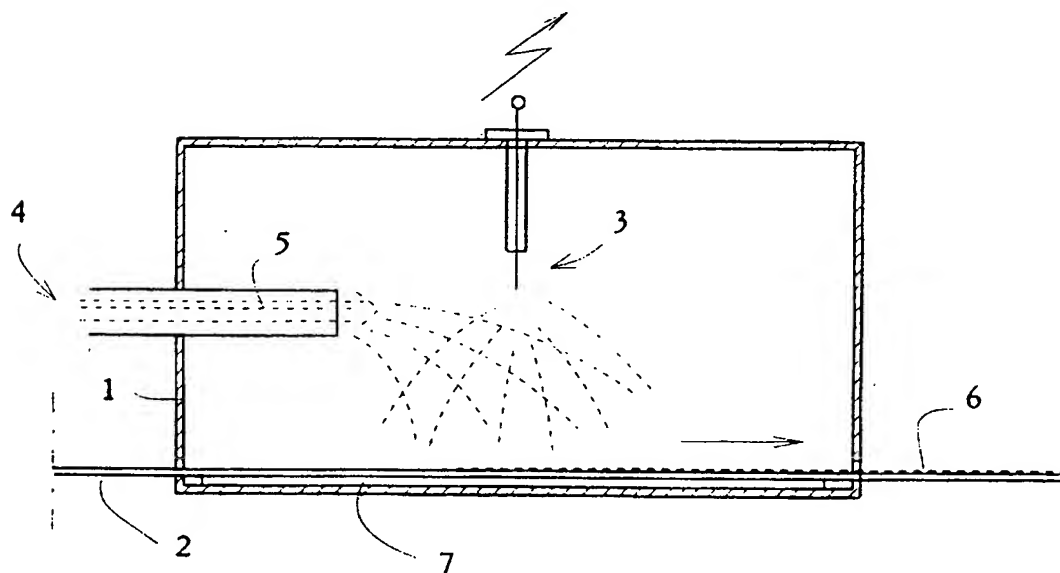


Fig. 2

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 97/00558

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: B05D 1/04, B05B 5/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: B05D, B05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2253164 A (HOECHST UK LIMITED), 2 Sept 1992 (02.09.92) --	1-5
X	WO 9611068 A1 (NEXUS CORPORATION), 18 April 1996 (18.04.96) --	1-5
A	DE 19517229 A1 (GEMA VOLSTATIC AG), 14 November 1996 (14.11.96), figure 1, abstract --	1-5
A	WO 9616745 A1 (OWENS CORNING), 6 June 1996 (06.06.96) --	1-5

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"B" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

16 December 1997

Date of mailing of the international search report

02-01-1998

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Johan von Döbeln

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 97/00558

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0435034 A1 (BALL CORPORATION), 3 July 1991 (03.07.91) -- -----	1-5

INTERNATIONAL SEARCH REPORT
Information on patent family members

02/12/97

International application No.
PCT/FI 97/00558

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 2253164 A	02/09/92	AT 126431 T AU 653989 B AU 1208492 A DE 69204127 D,T EP 0526606 A,B SE 0526606 T3 ES 2078036 T HU 66848 A HU 9203652 D JP 5508337 T PL 166928 B PL 296624 A US 5470603 A US 5656080 A WO 9214451 A	15/09/95 20/10/94 15/09/92 04/04/96 10/02/93 01/12/95 30/01/95 00/00/00 25/11/93 31/07/95 02/11/93 28/11/95 12/08/97 03/09/92
WO 9611068 A1	18/04/96	AU 3999895 A EP 0789632 A US 5585426 A ZA 9508403 A	02/05/96 20/08/97 17/12/96 08/05/96
DE 19517229 A1	14/11/96	JP 8299861 A	19/11/96
WO 9616745 A1	06/06/96	CA 2182391 A EP 0748258 A US 5618589 A	06/06/96 18/12/96 08/04/97
EP 0435034 A1	03/07/91	AU 639046 B AU 6688990 A CA 2028369 A JP 4271869 A MX 168479 B US 5032419 A	15/07/93 04/07/91 27/06/91 28/09/92 26/05/93 16/07/91